



NOTE:
 NO HOLES ARE TO BE DRILLED IN THE CHASSIS.
 A LUG, OR EXTRA SUPPORT MEMBER MUST BE
 WELDED ONTO THE CHASSIS AND IN TURN CAN BE DRILLED.

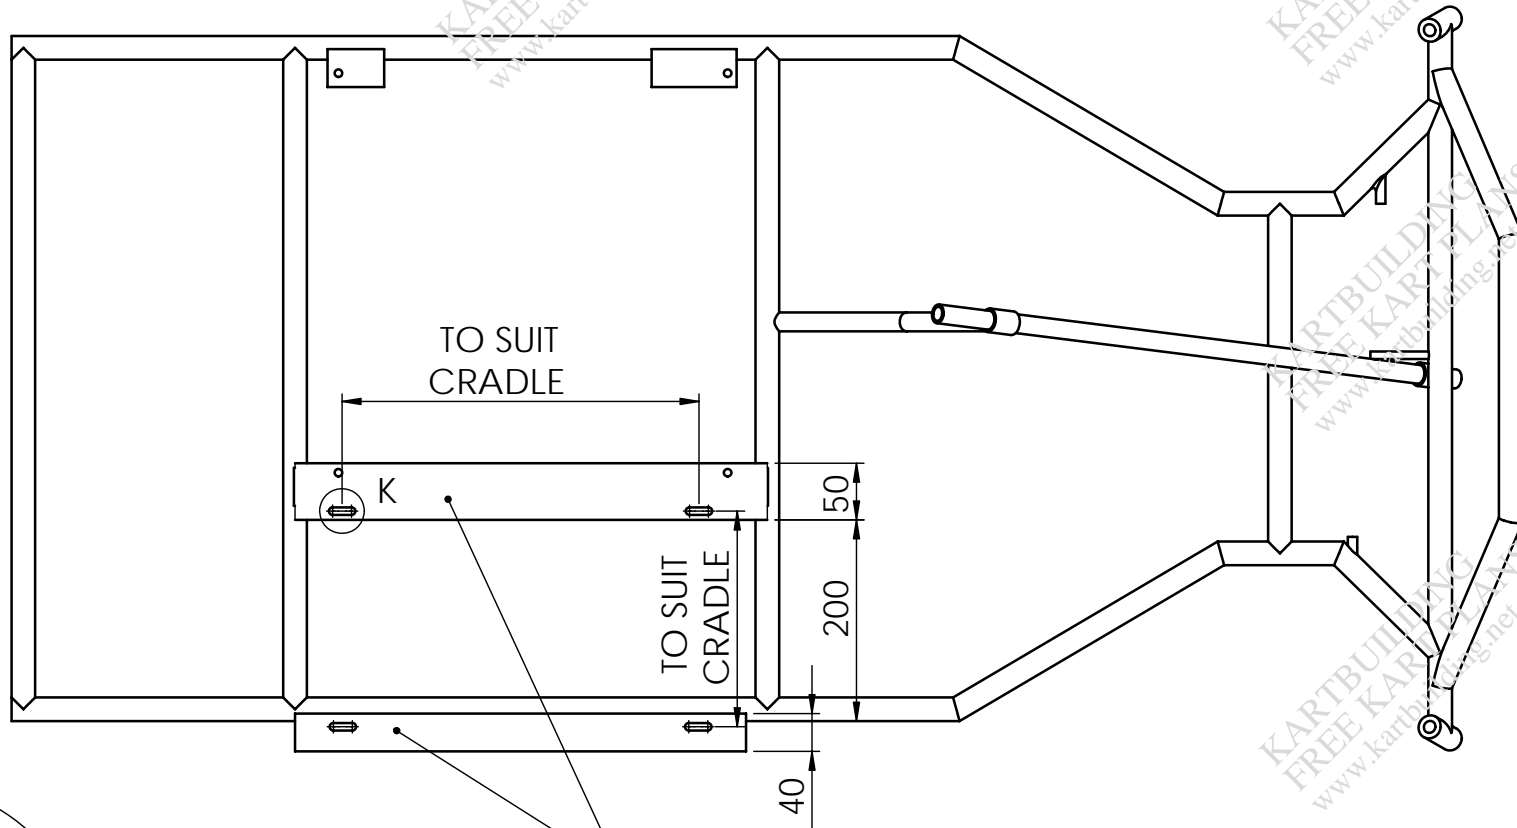

CHASSIS CRADLE SUPPORT MEMBER
 WELDED TO CHASSIS.

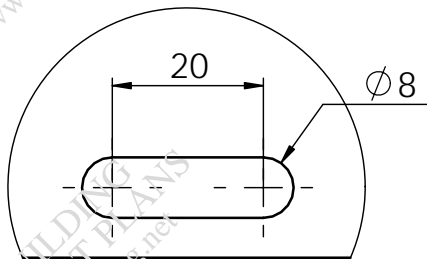

DETAIL K
 SLOT TO ALLOW FOR
 CHAIN TENSIONING

KARTBUILDING	
FREE RACING KART PLANS	
www.kartbuilding.net	

CHASSIS CRADLE SUPPORT	
DRG. NO.: 16	DATE: 24/07/03

© STEPHEN BURKE